



# TC Series Terminal Covers


## Assembly and Installation Instructions

### Weatherized Terminal Cover Kits

Model	Cat. No.	Description
TC-4B	301203-001	Weatherized terminal cover for 4.2 Series - Black
TC-6B	301204-001	Weatherized terminal cover for 6.2 Series - Black
TC-4W	301203-002	Weatherized terminal cover for 4.2 Series - White
TC-6W	301204-002	Weatherized terminal cover for 6.2 Series - White

1. Remove the Nut on the outside of the Terminal Cover.
2. Thread the cable through the Nut and then the Gland and attach to terminals.
3. Remove screws from terminal plate and attach Terminal Cover to speaker using screws supplied with the Terminal Cover Kit.
4. Tighten the Nut to the Terminal Cover to form a seal around the cable.

**Note:** In order to form a liquid-tight seal, the cable must have a single, round, cross-sectional jacket. The diameter of the cable must be between .17 in. (4.32 mm) and .395 in. (10.03 mm). If the diameter of the cable is larger than .25 in., remove the white rubber insert within the gland.

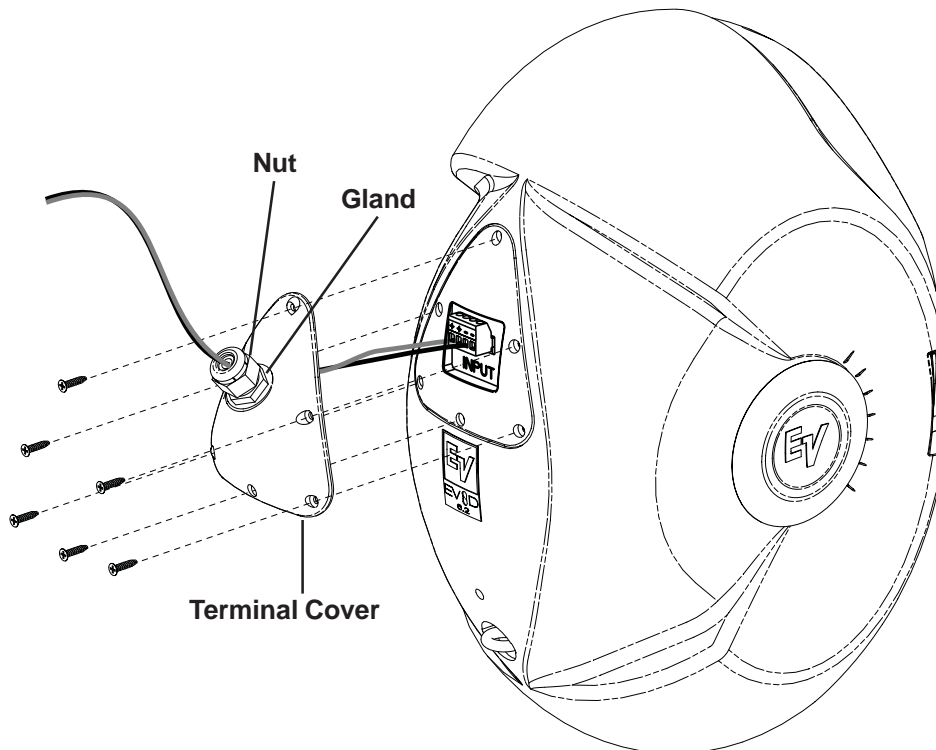

12000 Portland Avenue South, Burnsville, MN 55337  
Phone: 952/884-4051, Fax: 952/884-0043

[www.electrovoice.com](http://www.electrovoice.com)

© Telex Communications, Inc. 1/2007  
Part Number 38110-075 Rev C

U.S.A. and Canada only. For customer orders, contact Customer Service at:  
**800/392-3497 Fax: 800/955-6831**

Europe, Africa, and Middle East only. For customer orders, contact Customer Service at:  
**+ 49 9421-706 0 Fax: + 49 9421-706 265**

Other International locations. For customer orders, contact Customer Service at:  
**+ 1 952 884-4051 Fax: + 1 952 887-9212**

For warranty repair or service information, contact the Service Repair department at:

**800/685-2606**

For technical assistance, contact Technical Support at: **866/78AUDIO**

Specifications subject to change without notice.